

Delos International

DA-302K/DA-303K
DA-302DK/DA-303DK



Access Control Standalone



Application

This product is specially designed for single access control application in high-end and luxury construction

Specification

- n OLED display(DA-302DK/DA-303DK)
- n Touch sensor keypad
- n 100 sets of time zone regulation, divide everyday into 5 periods, each using a different process to open the door: card flashing, card flashing+password.
- n Using manager card to register card or UID+password on standalone without networking.
- n Public password optional, unlimited to time zone regulation..
- n Support green software, use RS485 for commutation.
- n Access record used to check on work attendance.
- n High security, waterproof, anti-tamper with a alarm signal output.


DA-302K/DA-303K DA-302DK/DA-303DK

Electronic	
Power Supply	DC 9-15V
Rower Consumption	<200mA
Read Type	DA-302K/DA-302DK read EM card 8~10cm DA-303K/DA-303DK read Mifare card 5~8cm
Number of users	10'000
Capacity of records	10'000
Communication Port	RS485
LED Tips	Card Flashing/Keypad
Data Storage	4M bits Flash Memory
Keypad	Touch sensor keypad
Software	Green software
Display	OLED (DA-302DK/DA-303DK)

Model	
Dimension	9.5cm*9.5cm*2.0cm
Weight	180G
Installation	EU/Asian standard back box
Material	ABS+PC

Environment	
Temperature	-25℃~70℃
Humidity	<90%

Dimension

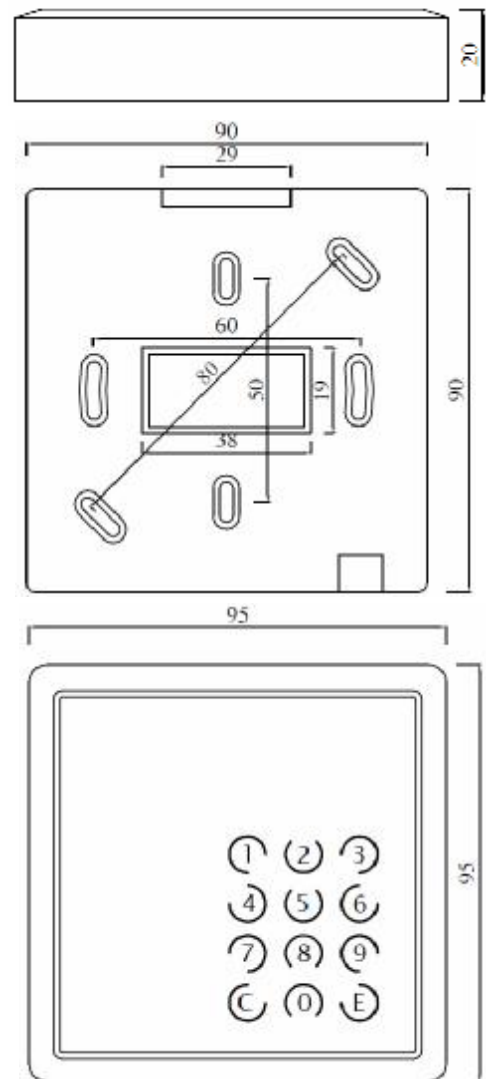

Order attention

- 1、Warranty: 1 year
- 2、Available type: see following pictures



DA-302K/DA-303K



DA-302DK/DA-303DK