

Delos International

DR-402/DR-403



Specification

- n A variety of optional colors and textures as gold-grid, gold-phoenix, mirror-grid, mirror-pure, wine-red, champagne, etc. Requested to indicate in orders.
- n With standard Wiegand output signal and several keypad formats, compatible with other access control system.
- n Build-in beeper and LED, display the working saturation directly.
- n Could be installed on EU/Asian back box.
- n Sustaining card's types :EM card or Mifare card
- n Build-in watchdog


Application

This product is specially designed for high-end and luxury construction access control application, as hotels, clubs, top office building, etc.

Electronic	
Power Supply	DC 9-15V
Rate Current	<200mA
Read Range	DR-402 read EM card 8-10cm DR-403 read Mifare card 5-8cm
Output Format	WG26/WG34
Input	LED control*2 Beeper control*1 Hold on*1

Model	
Dimension	9.5cm*9.5cm*2.0cm
Weight	180G
Installation	EU/Asian standard back box
Material	ABS+PC

Environment	
Temperature	-25°C~70°C
Humidity	<90%

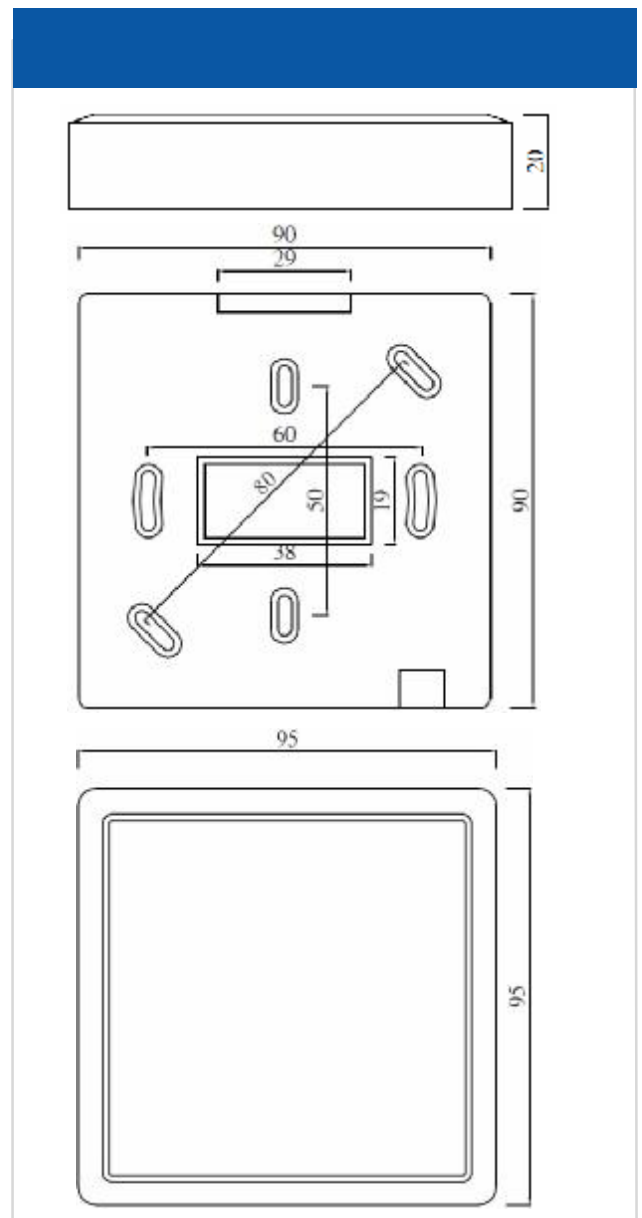

Order

1、Warranty: 1 year

2、Available type: see following pictures



gold-grid



gold-phoenix



mirror-grid



mirror-pure



wine-red



champagne